

ALLERS ALUMINIUM



**AG/77 ROLLER
GARAGE DOORS**



Safety

A safety edge system and a manual override system are fitted to roller garage doors in case of a power or motor failure.



Conformity to standards

Allers Aluminium roller garage doors conform to the European standards of safety and wind load resistance EN 13241-1, EN 12424. This is confirmed by the TÜV-certificate of CE marking and by test reports.



Wind resistance

Roller garage doors withstand a wind load up to 450 Pa, which corresponds to class 2 according to EN 12424, and they can be installed in openings up to 5,92 m wide and 3,8 m high.



Maximum space saving

Roller garage doors save space outside as well as inside the premises. They are the ideal solution for garages with a short driveway. You can also efficiently utilize all available roof space.



Lightweight and durable

Aluminum roller garage doors are resistant to rain, temperature fluctuations and corrosion. They are solid and secure, environmentally friendly and light.



Variety of mounting types

Roller garage doors can be mounted outside or inside the premises, with a visible or concealed shutter box. Mounting doors on consoles is suitable for installation indoors, where the components are protected from the rain.



ADVANTAGES OF THE PROFILES FOR ROLLER GARAGE DOORS




Optimum strip thickness

AG/77 profiles are fabricated from aluminium strip 0,49 mm thick. This guarantees a strong and durable wind load resistant design.



Abrasion resistance

PUR/PA* is a two-layer lacquer coating applied to profiles at a thickness of 25-30 microns which provides high resistance to abrasion, scratches and cracking.



High quality foam filling

Environmentally friendly CFC free foam. The even foam filling without voids and cavities provides good strength characteristics.



Additional ventilation

EA/77 profiles with vents provide additional ventilation.



Partial view and illumination

Installing EV/77W profiles with windows and special acrylic glazing allows daylight to penetrate inside the garage. This allows you to access your car or find something without turning the light on.



Wide colour range


More than 17 profile colours and different finish types, including imitation woodgrain finish with lamination, provide original and individual colour solutions.

*PUR/PA coating is a polyurethane coating with polyamide particles, which are very solid and resistant to corrosion.

PROFILES FOR ROLLER GARAGE DOORS


Aluminium
roll- formed
profiles

AG/77

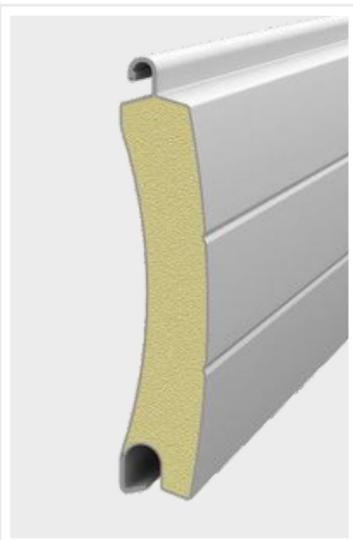

Aluminium
extruded
profiles

EA/77

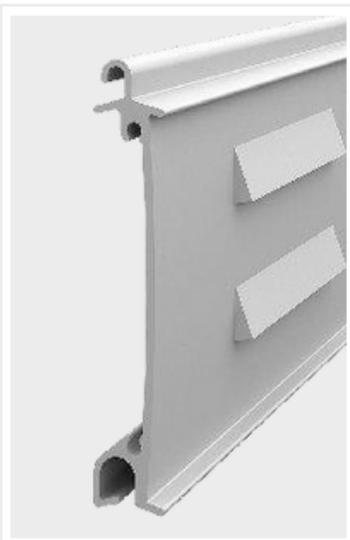

Aluminium
extruded
profiles

EV/77W



white**



brown**



grey**



beige**



purple red**



silver**



black**



anthracite**



green fir



cream**




dark brown**



green moss**




dark blue**



graphite



golden oak**



irish oak



black cherry



nut



golden oak*



black cherry*



nut*




mahogany*

Printed colours are only a guide, as they often appear differently in comparison with the actual colour range.

*Renolit film lamination

**Colour solutions for ready-made roller garage doors

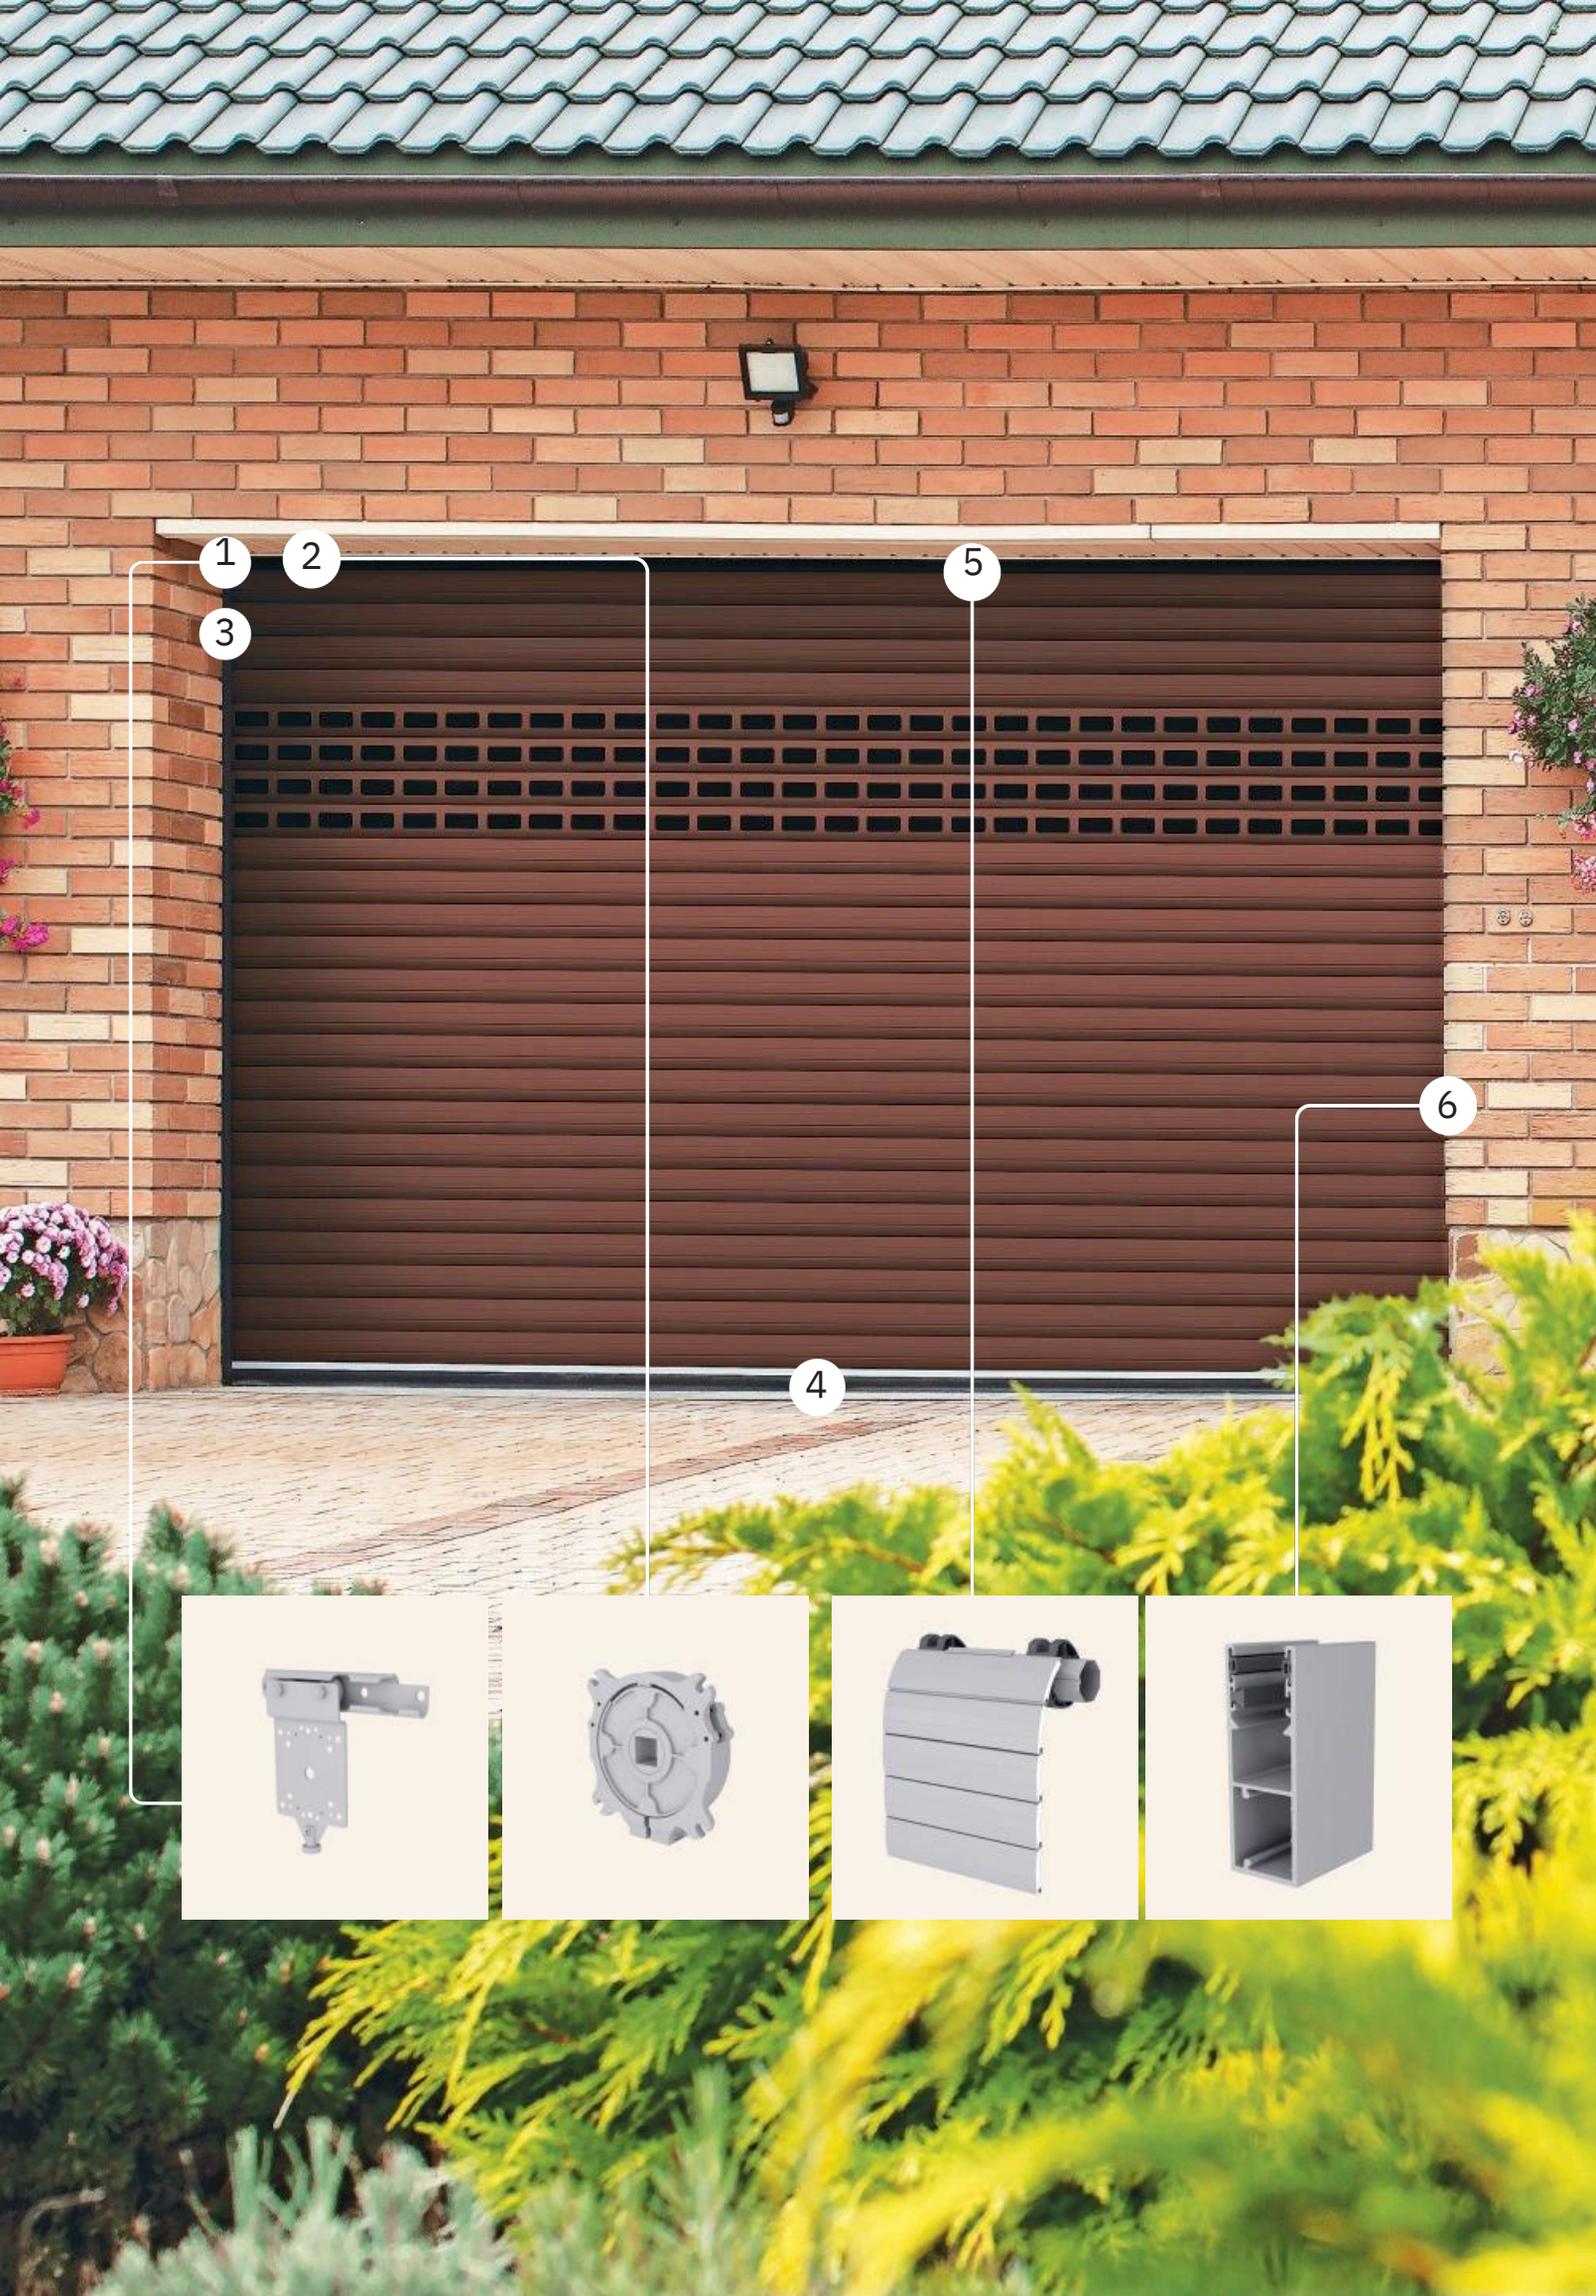

1

2

3

5

4

6





DESIGNED WITH SAFETY AND RELIABILITY IN MIND

1

Movable carriages

Prolong the operating life of your roller garage door by ensuring smooth and secure movement of the curtain along the guide rails, which reduces the load on the motor and the suspension system.

2

Safety brake

A safety brake prevents dropping of the curtain in case of electric motor failure.

3

Hand operation for emergency opening

It is recommended that you optionally install a detachable hand drive in your automatic roller garage door to open the door in case of power failure.

4

Safety edge system

If an obstruction is detected in the opening, and it contacts with the edge of the roller garage door, the curtain is stopped or reversed (depending on the settings).

5

"Snail" suspension system

This ensures even winding of the curtain and reduces abrasion of the curtain during operation.

6

Guide rails with wind locks

The combination of AG/77 profiles with reinforced side locks and the guide rails with wind locks provides the high wind load resistance of the curtain.



COMFORT AND CONTROL

Automatic operation

A wide range of automatic operation and safety devices: electric motors with manual override system, controls such as key lock switches or the more comfortable operation by radio remote control, plus a safety edge system that serves to stop the curtain in case of any obstruction being in the opening.

Automatic

operation ensures the most convenient and multi-functional control of roller garage doors. You can operate them sitting in a car by

pressing
a button just once.



Manual override system

According to EN 13241-1 it must be possible for a person to exit the premises in case of power or electric motor failure. There are two ways to achieve this: through an alternative / emergency exit or by means of a manual override fitted to the door. In the latter case, the door must be equipped with an electric motor with manual override system (NHK) and fitted with a detachable hand drive.





ALLERS ALUMINIUM

CONTACT DETAILS:

Windhoek Branch:



17 HOLSTEIN STREET, LAFRENZ INDUSTRIAL
WINDHOEK, NAMIBIA



+264 61 261 455



INFO@ALLERSALUMINIUM.COM



WWW.ALLERSALUMINIUM.COM

Swakopmund Branch:



PATRICK LUNGADHA STREET
ERF 4901, UNIT 17
NEW INDUSTRIAL AREA SWAKOPMUND



+264 81 766 2068



OLIVER@ALLERSALUMINIUM.COM



WWW.ALLERSALUMINIUM.COM

Cape Town Branch:



716 PROTEA ROAD, HELU PARK
KLAPMUTS, WESTERN CAPE



+27 (064) 676 4716



INFO.CPT@ALLERSALUMINIUM.COM



WWW.ALLERSALUMINIUM.COM